

ClearOne®

COLLABORATE® Pro 900 Quick-Start Guide




COLLABORATE PRO 900

COMPONENTS INCLUDED

COLLABORATE Pro 900	
	COLLABORATE Pro codec with power supply, COLLABORATE Remote control with dongle, and HDMI cable.
	910-2100-003 UNITE 200 PTZ camera, power supply, HDMI cable and RS232 Serial Control cable. <i>Note: The remote control inside the camera box is only for any advanced configuration in the camera, if required.</i> <i>For the camera's control, use the COLLABORATE Codec Appliance's remote control.</i>
	CONVERGE Pro 840T Mixer, Beamforming Microphone Array, CONVERGE USB, cables and power supplies. <i>Note: The Beamforming Microphone Array mounting kit must be ordered separately.</i>

MAKING THE CONNECTIONS

Connect the Beamforming Microphone Array to the CONVERGE Pro 840T, then connect the CONVERGE Pro 840T to the CONVERGE USB. Connect the CONVERGE USB, UNITE 200 camera, Ethernet, and monitor(s) to the COLLABORATE Pro codec as shown.

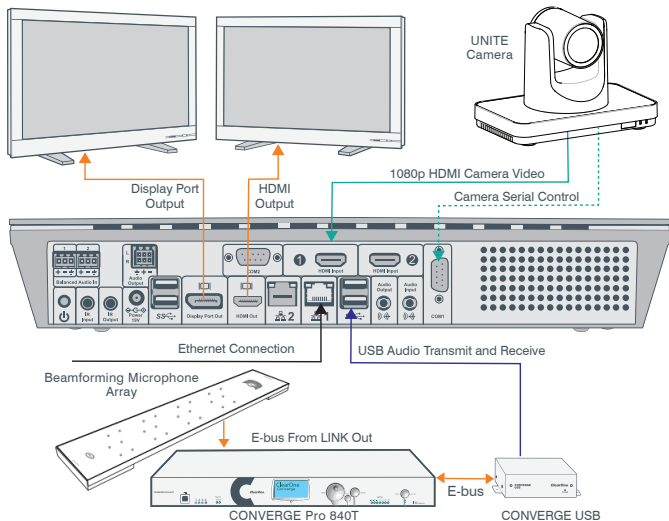

NOTE: Audio output and power connections not shown.


COLLABORATE PRO 900

CONNECTING THE REMOTE CONTROL DONGLE

The Remote Control includes a dongle that plugs into the FRONT USB port on the codec.



CONFIGURING AUDIO INPUT AND OUTPUT

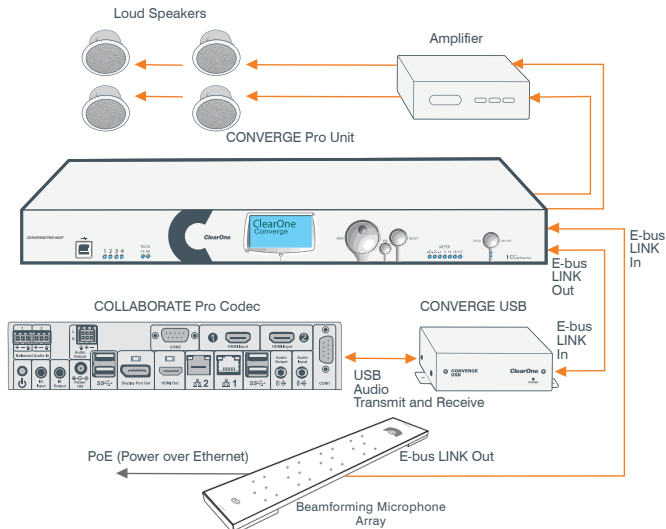

NOTE: Power connections not shown.

COLLABORATE PRO 900

CONFIGURING DISPLAY SETTINGS

After all peripherals are connected to the unit, turn the unit on.

Once COLLABORATE Pro is loaded – you will see your local camera video on your screen.

Using the remote control, navigate to the display settings:

Settings > System > Display

System


Audio	Display Mode	Single Mode
Camera	Display	Single/Main
Display	Device	HDMI
	Resolution	1280x720
	Display Remote On Main	<input checked="" type="checkbox"/>
	Keep Aspect Ratio	<input checked="" type="checkbox"/>
	Secondary Display Used For Data Only	<input type="checkbox"/>

According to your monitor capabilities, set to the maximum supported resolution. If 2 monitors are connected to the unit, the display mode is automatically changed to dual mode and you can set both monitors' resolutions.

CONFIGURING AUDIO SETTINGS

The COLLABORATE Pro audio input and output is Converge Pro.

Verify this in COLLABORATE **Settings > System > Audio**

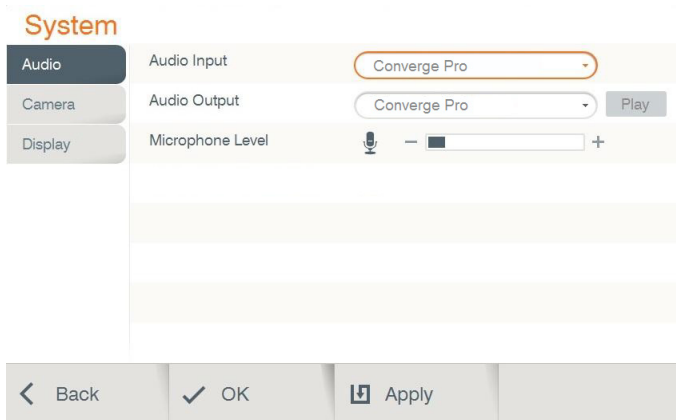

COLLABORATE PRO 900

CONFIGURING NETWORK SETTINGS

Using your remote control, navigate into the network settings:

Settings > Advanced > IP

Advanced			
Admin	Obtain address from DHCP	<input checked="" type="checkbox"/>	Ethernet Speed 1000.0
IP	IP Address	<input type="text" value="172.20.1.10"/>	
Directory	Subnet Mask	<input type="text" value="255.255.0.0"/>	
H.323	Default Gateway	<input type="text" value="172.20.0.253"/>	
SIP	Obtain DNS automatically	<input checked="" type="checkbox"/>	
Multicast	DNS Server	<input type="text" value="172.20.0.100"/>	
Firewall	Additional DNS Server	<input type="text" value="172.20.0.105"/>	
Spontania	DNS Suffix	<input type="text" value="Clearone.com"/>	

The COLLABORATE Pro obtains its IP automatically by default from the DHCP server.

Uncheck the DHCP checkbox in order to manually configure network settings.

CLEARONE CONTACTS

HEADQUARTERS:

Salt Lake City, UT USA

5225 Wiley Post Way
Suite 500
Salt Lake City, UT 84116

Sales: 800-707-6694

Toll Free: 800.945.7730

Fax: 801.303.5711

e-mail: sales@clearone.com

Europe & Oceania

Tel: +44.1454.616.977

e-mail: global@clearone.com

Latin America

Tel: +801.974.3621

e-mail: global@clearone.com

TechSales

Tel: 800.707.6694

e-mail: techsales@clearone.com

Technical Support

Tel: +800.283.5936

e-mail: collaborate.support@clearone.com

Asia Pacific

Tel: +852.3590.4526

e-mail: global@clearone.com

Middle East

Tel: +852.3590.4526

e-mail: global@clearone.com

© 2016 ClearOne, Inc. All rights reserved.

Information in this document is subject to change without notice. QSG-0025-001 Revision 1.2, March, 2016